


INSTRUCTION MANUAL

QSERVICE - 7704A OPERATORS MANUAL SAMPLE - QSERVICE

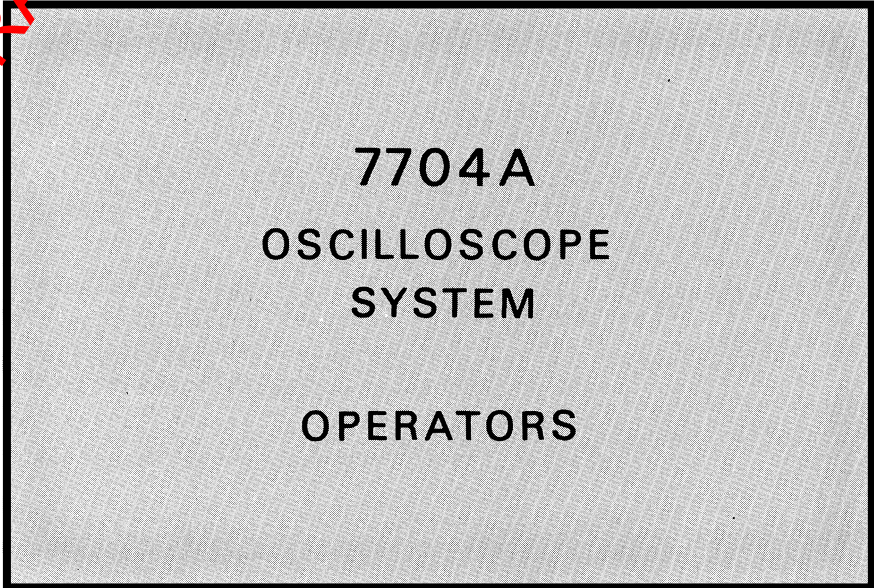

Serial Number _____

TABLE OF CONTENTS

SECTION 1	OPERATING INSTRUCTIONS	Page	SECTION 1	OPERATING INSTRUCTIONS (cont)	Page
	Preliminary Information			Remote Single-Sweep Reset	1-17
	Operating Voltage	1-1		Display Photograph	1-17
	Operating Temperature	1-2		Applications (Fig. 1-1 Combinations)	
	Plug-In Units			Vertical Amplifier Plug-Ins	1-18
	Installation	1-2		Time-Basis Plug-Ins	1-18
	Interchanging Plug-ins	1-2		X-Y Operation	1-18
	Controls and Connectors			Fasten Displays	1-19
	Front-Panel Color Coding	1-2		Sampling Displays	1-19
	Location (Fig. 1-2A & B)	1-3, 1-4		Special-Purpose Plug-Ins	1-19
	Operating Checkout (and Familiarization)	1-5			
	Simplified Operating Instructions		SECTION 2	SPECIFICATIONS	
	Single-Trace Displays	1-8		Electrical Performance Requirements	
	Dual-Trace & Dual-Sweep Displays	1-8		(7704A Only)	
	Delayed Sweep Displays	1-9		Vertical Deflection System	2-1
	X-Y Displays	1-9		Triggering	2-1
	Detailed Operating Information			Horizontal Deflection System	2-1
	Intensity—Focus—Astigmatism Controls	1-9, 1-10		Calibrator	2-2
	BEAM FINDER Switch	1-10		Character Readout (Optional)	2-2
	CONTROL ILLUM Switch	1-10		Signal Buffer (Optional)	
	Trace Alignment	1-10		Vertical Signal Output	2-2
	Graticule, Light Filter	1-10		Z-Axis Input	2-2
	Readout System	1-11		+ Sawtooth Output	2-2
	Vertical and Horizontal Mode			+ Gate Output	2-3
	Logic	1-12		Remote Reset Input (Single-Sweep)	2-3
	VERTICAL MODE Switch	1-13		Cathode Ray Tube (CRT)	2-3
	HORIZONTAL MODE Switch	1-14		Power Supply	2-4
	Vertical Trace Separation	1-15		Environmental Characteristics	2-4
	TRIGGER SOURCE Switches	1-15		Physical Characteristics	2-4
	Intensity Modulation (Z-Axis)	1-15		Instrument Options	2-4
	CALIBRATOR Output	1-15		Standard Accessories	2-5
	Signal Outputs	1-16		System Electrical Characteristics	2-5
	Probe Power	1-17			