


2465B/2455B/2445B OSCILLOSCOPES and OPTIONS

OPERATORS

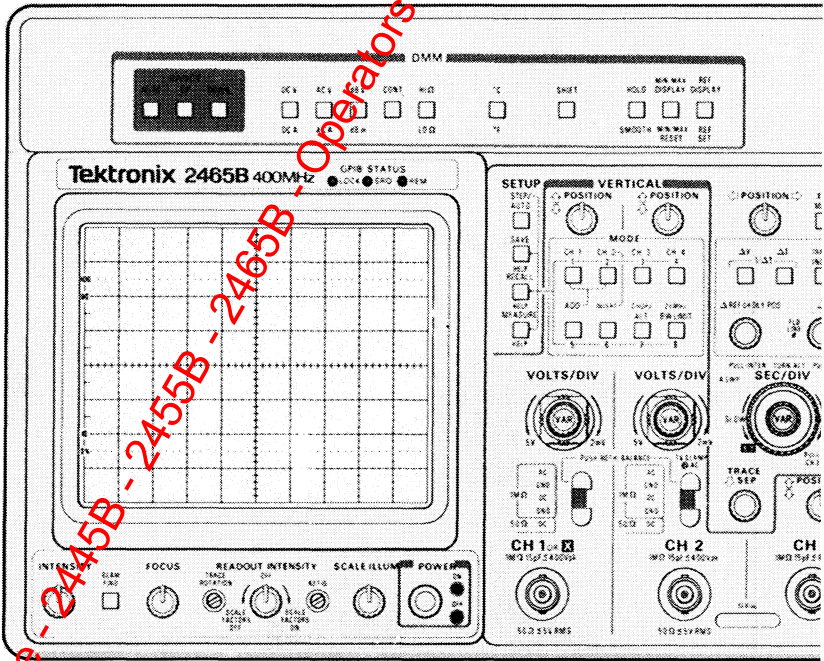

Qservice - 2445B - 2455B - 2465B - Operators Manual Sample - Qservice

Qservice ----- This Document is a complete scan from the Original Tektronix Manual ----- Qservice

Contents

	Page
Preface	i
Illustrations	vi
Tables	vii
Operators Safety Summary	viii
1 General Information	
Preparation for Use	1-1
Safety	1-1
Line Voltage Selection	1-1
Line Fuse	1-1
Power Cord	1-3
Instrument Cooling	1-4
Start-up	1-4
Repackaging For Shipment	1-5
2 Operation	
Fundamentals	2-1
Parametric Measurements	2-1
Getting a Display	2-2
Assigning Parametric Measurements to Auto Setup	2-3
Vertical	2-4
Horizontal	2-6
Trigger Controls	2-6
Video Triggering	2-9
Readout	2-10
Measurements with Cursors	2-13
Voltage Measurements	2-15
Display Operation	2-15
Signal Connections	2-16
Magnify Waveform Details with Delayed-Sweep	2-17
B-Trigger Operation	2-18
Delta-Delay-Time	2-19
Single-Delay-Time Measurements	2-20
Time Interval Measurement	2-21
Precision Timing	2-22
Triggered Delta-Delay-Time Measurements	2-23
Time Interval Resolution	2-25
Measurement Updating	2-25
Frequency, Period, and Totalize Counting	2-27
Frequency Measurement with External Reference (Option 1E)	2-28
Delay Sweeps by Event Counts	2-28
Logic Triggering	2-32
Word Recognizer Operation	2-34
The Word Out Signal	2-35
Frequency Limit for Auto Level or Parametric Measurements	2-35
DMM	2-35
Save and Recall Operation	2-36

3 Applications

Peak-to-Peak Voltage	3-2
Absolute Voltages Using Cursors	3-2
Noise Immunity	3-2
DC Voltage Measurement	3-3
Amplitude Modulation	3-3
Frequency Modulation	3-4
Measuring Video Signals in IRE Units	3-5
Avoiding False Displays with Multi-Mode Signals	3-5
Algebraic Addition to Detect Coincidence or Cancel Interference	3-5
Observing Coincidence of Digital Signals	3-6
Measuring Off-Ground Signals And Cancelling Interference	3-6
Period and Frequency	3-8
Rise Time and Fall Time	3-9
Propagation Delay	3-11
Setup and Hold Times	3-12
Slew Rate	3-13
Time Ratio (Duty Factor)	3-13
Phase Difference Between Two Signals	3-15
Measuring Millivolt Signals	3-17

4 Checks and Adjustments

Introduction	4-1
Initial Setup	4-1
Trace Rotation and Adjustment	4-2
Astigmatism Adjustment	4-2
Auto DC Balance Routine	4-3
Probe Compensation	4-4
Matching Channel 2 Delay	4-5
Amplitude Check	4-6
Timing Check	4-7

5 Controls, Connectors, and Indicators

Introduction	5-1
Power And Display	5-1
Setup and Vertical	5-4
Horizontal	5-12
Delay and Delta Controls	5-15
Rear Panel	5-27
DMM	5-29
DMM Displays	5-33
Display-Mode Interactions	5-33

Qservice 2445B-2455B-2465B - Operators Manual Sample - Qservice

6	Performance Characteristics	
	Performance Conditions	6-1
7	Options and Accessories	
	Introduction	7-1
	Option 11.....	7-1
	Option 1R.....	7-1
	Power Cord Options	7-2
	Standard Accessories.....	7-3
	Optional Accessories	7-5
A	Appendix A	
	Extended Functions with Diagnostic Exercisers.....	A-1
B	Appendix B	
	Sequence Programming and Operation.....	B-1
	Executing Sequences.....	B-3
C	Appendix C	
	Power Up Tests.....	C-1
	Kernel Test	C-1
	Confidence Tests	C-1
D	Appendix D	
	Delta-Time and Delta-Delay-Time Accuracy under Noted Conditions for the C/T Option.....	D-1
	Delay-Time Accuracy under Noted Conditions for the C/T/T Option	D-2

Qservice - 2445B - 2455B - 2465B - Operators Manual Sample - Qservice

Illustrations

Figure	Page
1-1 Line selector switch, line fuse, and detachable power cord	1-3
2-1 Readout display locations	2-11
3-1 Instantaneous voltages	3-2
3-2 Eliminating common-mode signals	3-7
3-3 Measuring rise times	3-10
3-4 Time between two pulses (cursor method)	3-12
3-5 Time ratio (duty factor).....	3-14
3-6 Phase difference between two signals	3-16
3-7 Small-angle phase difference	3-16
4-1 Probe low-frequency compensation	4-4
5-1 Power and display controls	5-3
5-2 SETUP and MODE buttons, and CH 1 and CH 2 POSITION controls	5-7
5-3 Channel 1 and Channel 2 controls and connectors.....	5-8
5-4 CH 3 and CH 4 controls and connectors and CALIBRATOR output	5-11
5-5 Horizontal and delta measurement controls.....	5-19
5-6 Trigger controls and indicators.....	5-26
5-7 Rear panel controls and connectors.....	5-28
5-8 DMM controls and connectors	5-32
6-1 Dimensional drawing	6-39

Qservice - 2445B - 2455B - 2465B - Operators Manual Sample - Oservice

Tables

Table	Page
1-1 Power Cord and Voltage Data	1-2
2-1 Resolution Selections.....	2-26
2-2 Auto Resolution.....	2-26
2-3 Delay-by-Events Combinations.....	2-29
2-4 Sweep Triggering	2-33
6-1 2465A/2455A/2445A Electrical Characteristics	6-2
6-2 Option 01 (DMM) Electrical Characteristics	6-19
6-3 Option 05 (TV) Electrical Characteristics.....	6-26
6-4 Option 06 (C/T/T) Electrical Characteristics.....	6-29
6-5 Option 09 (WR) Electrical Characteristics	6-35
6-6 Option 10 (GPIB) Electrical Characteristics.....	6-37
6-7 Mechanical Characteristics	6-38
6-8 Environmental Requirements	6-40
C-1 Confidence Test Numbers and Affected Functions.....	C-2

Qservice - 2445B - 2455B - 2465B - Operators Manual Sample - Qservice

Operators Safety Summary

The general safety information in this part of the summary is for both operating and servicing personnel. Specific warnings and cautions will be found throughout the manual where they apply and do not appear in this summary.

Terms

In This Manual

CAUTION statements identify conditions or practices that could result in damage to the equipment or other property.

WARNING statements identify conditions or practices that could result in personal injury or loss of life.

As Marked on Equipment

CAUTION indicates a personal injury hazard not immediately accessible as one reads the markings, or a hazard to property, including the equipment itself.

DANGER indicates a personal injury hazard immediately accessible as one reads the marking.

Symbols

In This Manual



This symbol indicates where applicable cautionary or other information is to be found. For maximum input voltage see Table 6-1.

As Marked on Equipment



DANGER—High voltage.



Protective ground (earth) terminal.



ATTENTION—Refer to manual.